


### PRODUCT DESCRIPTION

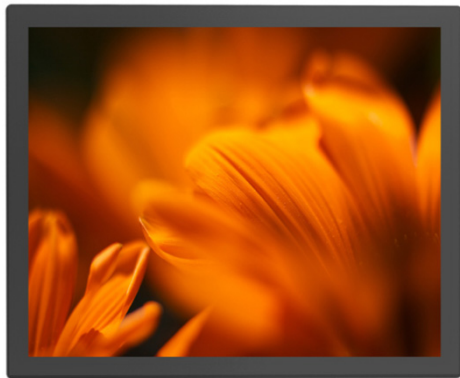

WTM170TL is a multi-touch touch monitor based on PCT touch technology. It applies flat panel design, wide viewing angles and clear, crisp images. Its slim design makes more aesthetic, and high integration.

#### Typical Applications:

Amusement and Entertainment Device, KIOSK, Self-service Terminal, Interactive Digital Signage, Gambling Machine, E-desk, etc.

### ADVANTAGES

#### Easy to Deploy

Plug-and-play. Adapts to universal power :12V DC.

#### High Definition

Full HD 1280 x 1024 resolution

#### Bearable and Professional Design

Totally metal construction and Aluminum frame  
Graceful appearance. To emphasize the content facing users

#### Flexible Installation

VESA mount, heavy-duty stand gives you a choice of fixed or desktop mounting

#### Flat surface design

Provide a flat surface similar to iPhone. Water-proof design could ensure whole performance affected by moisture and dirt, also to improve the reliability and to extend the product life

#### PCT multi-touch film

Superior touch experience and a unique touch signal penetration performance, to ensure touch function working with or without gloves

#### Extended multi-touch gestures

Support Windows touch gesture package.

#### Perfect various operating system support

Windows 7 /8, Android , Linux

### TECHNICAL SPECIFICATIONS LCD

#### > LCD Panel

Backlight	LED
Brightness	250 cd/m <sup>2</sup>
Contrast Ratio	1000:1
Viewing Angle	H:176° / V:170°
Response Time	5 ms (GTG)
Supported Colors	16.7M Colors
Display Resolution	1280 x 1024 (4:3)
Display Frame Rate	60Hz
Input Resolution	1280 x 1024 @ 60Hz (Analog) 1280 x 1024 @ 60Hz (Digital)
Connector	1x VGA /1x DVI /1x HDMI

#### > Mechanical

Dimensions	385.3 x 317.8 x 47.1 mm
Package Dimension	493 x 155 x 443.5 mm

Weight(approximately)	5 kg / 7 kg
Wall Mount Type	VESA,MIS-D,100,C

#### > OSD Functions

OSD Control	Push Button
OSD Language	English, Chinese

#### > Electrical

Power Supply	DC in: DC 12V (50/60 Hz)
Normal Operation	≤ 20W (typ.)
Power Off	≤ 2 W (typ.)

Internal Speaker	no
------------------	----

#### > Environmental

Operation	0 °C ~ 40 °C, 90% RH
Storage	-20 °C ~ 60 °C, 90% RH

#### > Options

Other	Wall mounts, Desktop base
-------	---------------------------

### TECHNICAL SPECIFICATIONS TOUCH

Glass	3 mm Black silk screen,ESG
Touch points	10
Touch technology	Projected Capacitive (PCT)
Stylus type	Finger, gloved hand, conductive stylus
Water Resistance	Unaffected by water droplets or condensation

Calibration	No calibration tool
Response time	7ms - 12ms
Connection	USB 2.0 (B socket)
Multi-touch protocol support	Windows
Operating System	Win 7/8,Android,Linux

#### Shanghai Headquarter



TEL: +86 (0)21-58361091  
400-621-1510  
ADD: Room 6206-6207, Building 6, NO.1687 Changyang Road, Yangpu District ,Shanghai, China

#### Beijing Office








TEL: +86 (0) 10-81786110  
ADD: Room 1001,Unit 5,Building 2, Tiantongyuan North Second District,Changping District,Beijing,China



Learn more at: [www.any-touch.com](http://www.any-touch.com) ,email us at: [sales@any-touch.com](mailto:sales@any-touch.com)  
Specifications subject to change without notice.  
Copyright © 2017 Anytouch Technologies Co., LTD



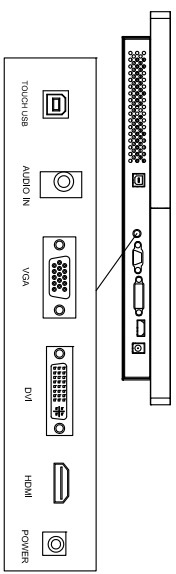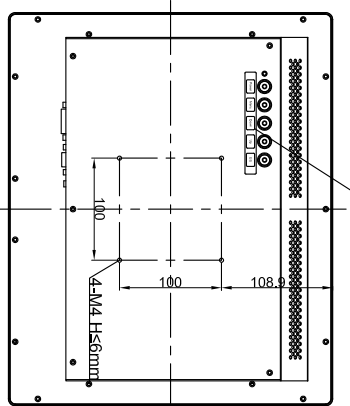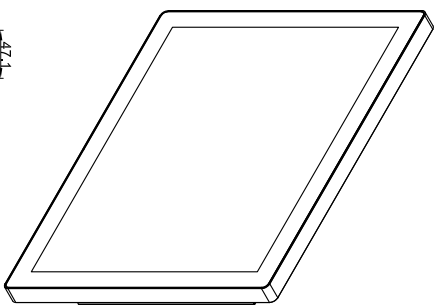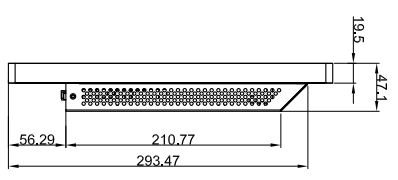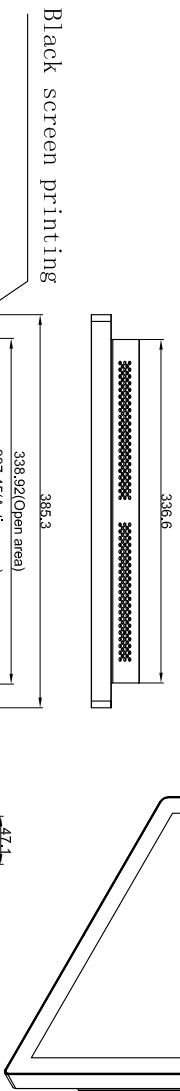

Tolerance Table	
Dimension Range	Tolerance(mm)
Under 25 mm	0.1
25.1-100 mm	0.2
100.1-250 mm	0.4
250.1-400 mm	0.8
400.1-500 mm	1.5
500.1-630 mm	2.0
630.1-800 mm	2.5

**TOLERANCING**

UNLESS OTHERWISE SPECIFIED ALL DIMS ARE mm

X ±0.2 RADIUS ±0.15

XX ±0.1 ANGLES ±0.5°

DO NOT SCALE DRAWING

Title: WTM170-CU

Date: 2017.12.13

Scale: NTS

Sheet: 1 of 1

Ver: 01



A

B

A

B

Rev	Date	Description	By
2			